

Technical data sheet

Roof conductor holder for tiled, slated and corrugated roofs, Rd 8, A2
Item number: 5217075



- Bottom section and conductor holder stainless steel (V2A)
- Bottom section with Ø 8.5 mm slot



A2 Stainless steel

Master data		
Item number	5217075	
Type	159 VA-V	
Description 1	Roof conductor holder	
Manufacturer	OBO	
Dimension	8mm	
Material	Stainless steel 1.4301	
Smallest sales unit	20	
Unit of quantity	Piece	
Weight	3 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	0,1782 kg CO2e / 1 Piece	


Technical data sheet

Roof conductor holder for tiled, slated and corrugated roofs, Rd 8, A2

Item number: 5217075



Dimensions

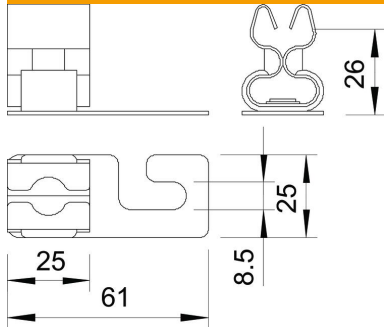

Length	61 mm
Width	25 mm
Height	34.4 mm

Technical data

Application	Corrugated roof
Conductor fastening type	With clip
Conductor diameter, max.	8
Conductor diameter, min.	8
Mounting type	Screw-on
Mounting height	21 mm
Fit	Rd 8 mm
ROHS-conformant	yes
Material of the holder	Rustproof steel (V2A)
Material of the support	Rustproof steel (V2A)