


# Technical data sheet

## Cable tray MKS-Magic® 60, unperforated, black

Item number: 6062979

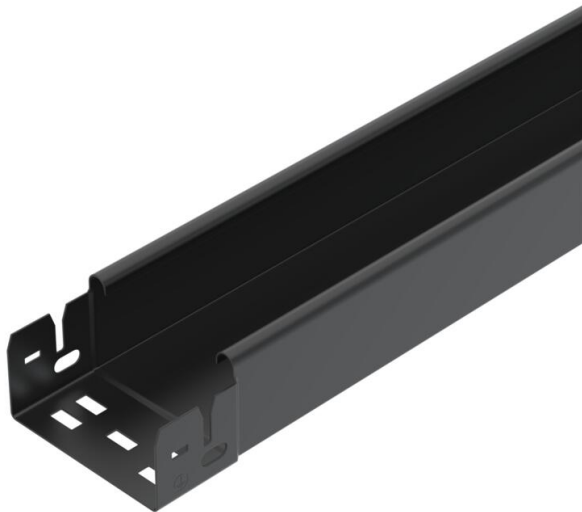

Unperforated cable tray with integrated quick fastening system. Black coated.  
Magnetic shield insulation without cover 20 dB, with cover 50 dB.



|      |                    |
|------|--------------------|
| St   | Steel              |
| P135 | PES135 - Polyester |

### Master data

|                                    |                               |
|------------------------------------|-------------------------------|
| Item number                        | 6062979                       |
| Type                               | MKSMU 610 FSK SW              |
| Description 1                      | Cable tray MKSMU              |
| Description 2                      | unperforated, quick connector |
| Manufacturer                       | OBO                           |
| Dimension                          | 60x100x3050                   |
| Colour                             | Jet black; RAL 9005           |
| Material                           | Steel                         |
| Surface                            | PES135 - Polyester            |
| Surface standard                   |                               |
| Smallest sales unit                | 6                             |
| Unit of quantity                   | Metre                         |
| Weight                             | 198.46 kg                     |
| Weight unit                        | kg/100 m                      |
| CO2 Footprint (GWP) Cradle-to-Gate | 4,4133 kg CO2e / 1 Meter      |


# Technical data sheet

## Cable tray MKS-Magic® 60, unperforated, black

Item number: 6062979



### Dimensions



|                 |          |
|-----------------|----------|
| Dimension       | 60 x 100 |
| Length          | 3,050 mm |
| Width           | 100 mm   |
| Height          | 60 mm    |
| Plate thickness | 1 mm     |
| Dimension B     | 100 mm   |
| Dimension W     | 100 mm   |

### Technical data

|                                         |                      |
|-----------------------------------------|----------------------|
| Connector version                       | Integrated connector |
| Mounting system fastening type          | Floor Ceiling Wall   |
| Maintain electrical functions           | no                   |
| With cover                              | no                   |
| Mounting perforation in base            | no                   |
| NATO hole pattern                       | no                   |
| Usable cross-section                    | 58 cm <sup>2</sup>   |
| Usable cross-section                    | 5800 mm <sup>2</sup> |
| ROHS-conformant                         | yes                  |
| Rustproof steel, pickled                | no                   |
| Side perforation                        | no                   |
| Wide-span version                       | no                   |
| Usable length                           | 3000 mm              |
| Type of connector, cable support system | Click fastening      |

### Loads

|                                   |           |
|-----------------------------------|-----------|
| Insertable support spacings, min. | 1.5 m     |
| Insertable support spacings, max. | 2.5 m     |
| Support spacing 1.5 m             | 1.5 kN/m  |
| Support spacing 1.75 m            | 1.25 kN/m |
| Support spacing 2.0 m             | 1 kN/m    |
| Support spacing 2.5 m             | 0.5 kN/m  |